



TCM-ITC802V

TCM-ITC802V is out door SIP inter com termina l, integrating access control, audio intercom and broadcasting functionalities. It supports wall mounting. With a dust-p roof and waterproof design, it can be applied in many indoor scenarios and offer the best communication experience for users.

TCM-ITC802V

Industrial Network Video Intercom

Features


- SIP lines
- High-Definition 1.3MP Video
- Built-in 3W speaker and AEC algorithm
- Integrate smart security, video intercom and broadcast
- With emergency call button interface, one-button call
- Support one output short circuit and one input short circuit for emergency button.
- Support PoE power supply
- Used in different environment and app lication scenarios.
- Water-proof, Dust-proof and Striking-proof design, avoiding malicious damage
- High compatibility

Compatible with SIP-based mainstream IP PBX/softswitch/IMS p latforms, such as Asterisk, Broadsoft, 3CX, Metaswitch, Elastix, Avaya, etc .

Application

- Programming and configuration through web GUI.
- Management and operation: DHCP and static IP, remote automatic software upgrade.
- The video intercom is designed for special applications
- where a telephone must be both sturdy and attractive.

Dimension

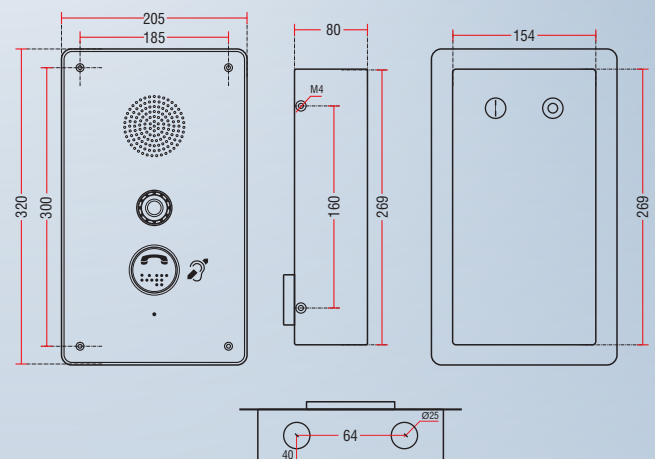

CE FC RoHS IK10

Distributed by