

TCM-AT230SIP

Network Terminal IP Amplier 60Watt

Description

TCMAT230SIP This terminal can be used for rooms that require an independent audio system, where there is 1 Microphone input, line audio input that can be connected to an audio player or mixer. Line Audio output can be added to the Power Amplifier if you need a large speaker power. There is a line speaker output. which can be directly connected to an analog speaker with a power of 2x30watt. The local system will stop when there is audio broadcasting information from the center. This device support Chime Audio, will sound when the paging button pressed before start announcement.

Spesification


Model	TCM-AT230SIP
Network Com. Protocol	IP, ARP, ICMP, DHCP, UDP, DNS, IGMP
	(SIP for IPT-230 PoES)
Network Interface	10 / 100 Base - TX, RJ45
RMS Power	2 * 30W @8
Decoding	MP3 / WMA / WAV
Frequency Range	20 Hz ~ 20 KHz
PoE Adaptor	No
Operating Temperature	0°C ~ 85°C
Power Consumption	Less than 300mV
Power Supply	DC 24V
Dimension	153mm x 100mm x 26mm

TCM-AT230SIP


Features

- This network terminal with built-in digital amplifier 2*30W high quality sound.
- Empowered by high-speed dual-core (ARM + DSP) chip of industrial grade, startup in less than 1 s
- Compact in Size and easy to install
- Support MP3, WMA, WAVand more decoding
- With a standard RJ45 network interface and supports on line firmware upgrade from long distance

Detail Image

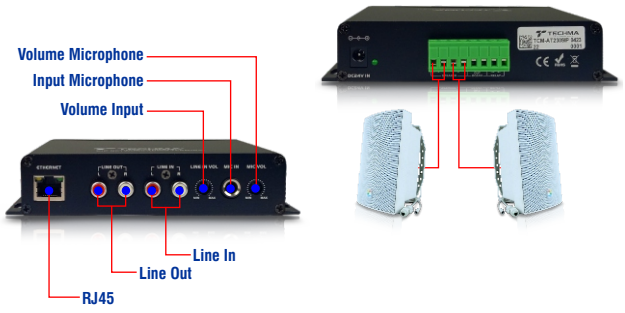

Topology

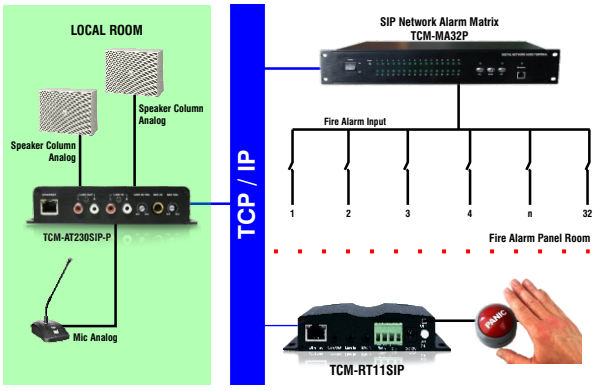

Available Models

TCM-AT215SIP/P
Network Terminal IP Amplier 30Watt



Features and specifications subject to change without notice