

TCM-4FC7530-AXJM

36x Full Color Network Speed Dome

FullColor — live your life in full color

24 JAM SELALU BERWARNA


5MP RESOLUTION | PoE | 24h COLOR 24 / 7 Color View | ONVIF ONVIF SUPPORT | 36X OPTICAL ZOOM | HUMAN Detector | IP 66

TCM-4FC7630-AXJM 5MP 36X Full Color Network Speed Dome adopts 1/2.8" progressive scan CMOS chip. With the 36X optical zoom lens, the camera offers more details over expansive areas. This series of cameras can be widely used for wide ranges of high definition, such as the rivers, roads, railways, airports, squares, parks, scenic spots, and venues, etc.

Features :

- Humanoid and face detection,capture & linked with alarm system.
- Excellent performance with Full Color Technology.
- 1/2.8" Progressive Scan CMOS.
- 36× optical zoom provide close up views over expansive areas
- Up to 2590 x 1920 @30fps resolution.
- WDR, HLC, BLC, 3D DNR, Defog, Auto Focus.
- Water and dust resistant (IP66) and vandal proof (IK10)
- Support face capture and humanoid detection.
- Support H.264/H.265 video compression.

DIMENSION

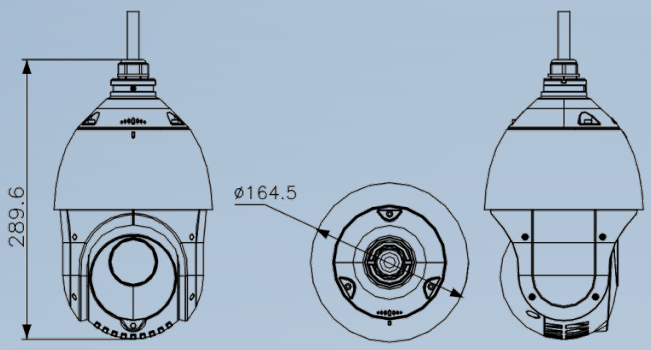

Distributed by

Specifications

CAMERA	
Image Sensor	1/2.8" progressive scan CMOS
Min. Illumination	Color: 0.005 Lux @ (F1.6, AGC ON); B/W: 0.001 Lux @ (F1.6, AGC ON), 0 Lux with IR
Shutter Speed	1/1 s to 1/30000 s
Slow Shutter	yes
Focus	semi-auto, manual, auto
Day & Night	8pc Warm Leds
Day/Night Switch	Full Color, auto, scheduled-switch
BLC	yes
WDR	120 dB WDR
HLC	yes
3D DNR	yes
Defog	yes
Image Settings	saturation, brightness, contrast, sharpness
White Balance	auto, ATW, sodium lamp, fluorescent lamp, indoor, outdoor, MWB, Locked WB
Optical Zoom	36 × Optical Zoom
Privacy Mask	up to 24 masks, polygon region, mosaic mask, mask color configurable
SNR	>52dB
LENS	
Focal Length	4.3 - 155mm, F1.6 25× Optical
Zoom Speed	approx. 3.6 s
FOV	Horizontal field of view: 57.6° to 2.5° (wide-tele) ; Vertical field of view: 34.4° to 1.4° (wide-tele), Diagonal field of view: 64.5° to 2.9° (wide-tele)
PTZ	
Movement Range (Pan)	360°
Movement Range (Tilt)	-15° to 90°(auto flip)
Pan Speed	pan speed: configurable from 0.1° to 80°/s; preset speed: 80°/s
Tilt Speed	tilt speed: configurable from 0.1° to 80°/s, preset speed 80°/s
Proportional Zoom	yes
Presets	300
Patrol Scan	8 patrols, up to 32 presets for each patrol
Pattern Scan	4 pattern scans
Power-off Memory	yes
Park Action	preset, pattern scan, patrol scan, auto scan, tilt scan, random scan, frame scan, panorama scan
3D Positioning	yes
PTZ Status Display	yes
Preset Freezing	yes
Scheduled Task	preset, pattern scan, patrol scan, auto scan, tilt scan, random scan, frame scan, panorama scan, dome reboot, dome adjust, aux output
VIDEO	
Max. Resolution	2560 x 1920 ,5 Mega Pixels
Stream Type	main stream, sub-stream, third stream
Main Stream	50Hz: 25fps (1920 x 1080, 1280 x 960, 1280 x 720)
Sub-Stream	50Hz: 25fps (704 x 576, 640 x 480, 352 x 288)
Video Compression	32 kbps to 16384 kbps
H.264 Type	yes
H.265 Type	Main profile
AUDIO	
Audio Compression	G.711alaw, G.711ulaw, G.722.1, G.726, MP2L2, PCM
Audio Bit rate	MP2L2: 32kbps, 40kbps, 48kbps, 56kbps, 64kbps, 80kbps, 96kbps, 112kbps, 128kbps, 144kbps, 160kbps, 192kbps
Audio Sampling Rate	MP2L2: 16kHz, 32kHz, 48kHz, PCM: 8kHz, 16kHz, 32kHz, 48kHz
Env. Noise Filtering	yes
SMART FEATURES	
Analityc	Face & Humanoid detection
Basic Event	audio exception, motion detection, exception
Smart Event	intrusion detection, line crossing detection, region entrance detection, region exiting detection, unattended baggage detection, object removal detection
Alarm Linkage	preset, patrol scan, pattern scan, memory card video recording, alarm output, sending email, notify surveillance center, upload to FTP
NETWORK & INTERFACE	
Communication Interface	RJ45, self-adaptive 10M/100M Ethernet port
Client Software	Techma VMS
Web Browser	IE 8 to 11, Chrome 57+, Firefox 52+, Safari 12+
Alarm Input / Output	1 alarm input/ 1 alarm output
Audio Input	1 audio input, 2.0 to 2.4Vp-p, 1k Ohm±10%,
Audio Output	1 audio output, line level, impedance: 600 Ω
SUPLEMENT LIGHT	
Warm Leds Distance	up to 150 meters
GENERAL	
Power	12 VDC, PoE(802.3at)
Power Cons. and Current	Max. 24 W, including max. 9 W for supplement light
Operating Conditions	-40°C to 70°C (-40°F to 158°F)
Dimensions	Φ 164.5 mm × 290 mm (Φ 6.48" × 11.42")
Weight	Approx. 2 kg (4.41 lb)