BATHROOM · TCM-NC8100 SERIES

TCM-NC8100BE

Bathroom Emergency Call Button

One pull or one press calls the nurse station.

Pull cord | **CALL button** | **Wet areas**



Pull + Push 2 ways to call	**Red LED** Call placed	**IP66** Wet areas	**86 mm** Wall box	**Latched** Until staff cancel	**Corridor** Light alert	**12 V DC** From controller

DESCRIPTION

The **TCM-NC8100BE** is the bathroom emergency button of the Techma TCM-NC8100 nurse call system. A patient presses the large red CALL button or pulls the red cord to ask for help from the toilet, the shower or the floor. The red LED shows that the call has been placed.

The call goes to the room controller, lights the corridor lamp and appears at the nurse station through the TCM-BGM9000Pro server. It stays on until staff arrive and cancel it with the presence button, so every response time is logged.

TYPICAL APPLICATIONS

Hospital wards | Nursing homes | Clinics | Accessible toilets

FEATURE

- Large red CALL button, easy to find and press
- Red pull cord with pendant: call from toilet or floor
- Red LED lights up when the call is placed
- Call stays on until staff cancel it with the presence button
- Alerts nurse station, corridor light, command centre
- Response time logged for SLA / KPI reports
- Waterproof housing for bathrooms and showers
- Fits a standard 86 × 86 mm wall box
- Wires to the TCM-NC8104GW / NC8102GW controller

TECHNICAL SPECIFICATION

MODEL	TCM-NC8100BE		
Application	Emergency call from the bathroom, toilet or shower of a ward room		
Call Method	Push button (CALL) or pull cord	**Indicator**	Red LED, lights when call is placed
Button	Red round button Ø 41 mm, “CALL”	**Pull Cord**	Red braided cord with end pendant
Call Cancel	Staff presence button TCM-NC8100PB	**Output**	Room controller bathroom input
Controller	TCM-NC8104GW / TCM-NC8102GW	**Server**	TCM-BGM9000Pro / TCM-NCS8100M
Power Supply	12 V DC from the room controller	**Consumption**	≤ 1.2 W
Protection	Waterproof, IP66	**Housing**	ABS, white
Operating Temp.	−10 to +45 °C	**Humidity**	20 – 80 % RH, non-condensing
Mounting	Flush, standard 86 × 86 mm wall box	**Weight**	Approx. 100 g
Dimension	86 × 86 × 10 mm (W × H × D)		

DIMENSION (mm)

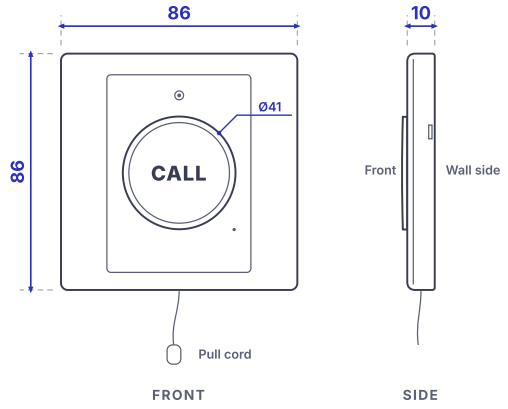

SYSTEM & APPLICATION

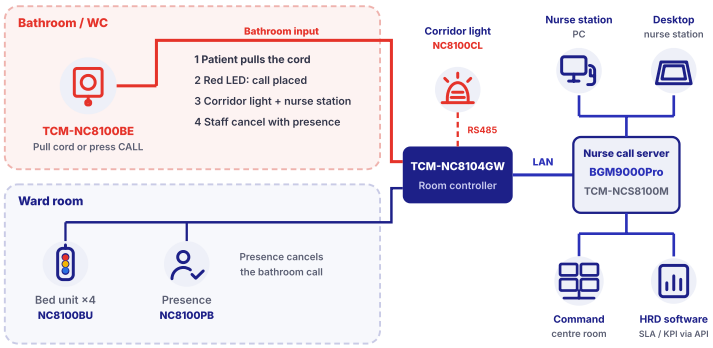

© 2026 Techma Technology · Specifications are subject to change without prior notice